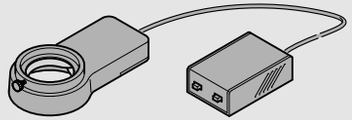

Ring illuminator with neon tube 5500 K, d=58/66 mm
417040-9100-000
(diffuse ring illumination, incl. control unit and power supply)



LED double spot for column 32
417040-9450-000
(incl. LED control unit, power supply and adapter)

LED double spot for mount S 76 mm
417040-9560-000 (without fig.)
(incl. LED control unit, power supply and adapter)

EasyLED spot polarizer
417096-9600-000



VisiLED ring light S, 80-25 BF, d=66 mm
417095-9225-000 (without fig.)
VisiLED ring light S, 80-55 BF, d=66 mm
417095-9255-000
(Segment ring illumination)

Set for simultanous fixing VisiLED BF+DF
417095-9500-000



Polarization filter set VisiLED/EasyLED
417095-9550-000
(only with 417095-9255-000)

Holder, d=66 mm to VisiLED DF
417095-9510-000



VisiLED ring light S 40-10 DF, d=66 mm
417095-9300-000
(Segment ring illumination for incident-light darkfield)



Controller MC 1000 for VisiLED
417095-9040-000
(1 VisiLED illuminator connectable)

Foot button S
435602-9010-000
(without fig.)

Multiple controller MC 1500 for VisiLED
417095-9000-000
(2 VisiLED illuminator connectable)

Power supply 100...240 V, 50...60 Hz for VisiLED
417095-9050-000

Spacing ring S, d=66x57 mm
435448-0000-000
Spacing ring S, d=66x40 mm
435449-0000-000
(without fig.)

Slit-ring illuminator 1500 for incident-light darkfield, d=66 mm
417075-9011-000



Diffuser S, telescopic, d= 66 mm/M8
435507-0000-000
(diffuse dome illumination)

Slit-ring illuminator 1500 ECO, d=66 mm, 9/1000 mm
435540-9005-000
Slit-ring illuminator 1500 ECO, d=66 mm, 9/2000 mm
435540-9006-000 (without fig.)

Polarization filter set S, d=66 mm
417075-9009-000
(for reduced reflection)

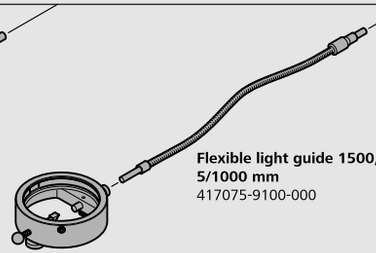

Vertical illuminator S, d=66 mm, adjustable
435505-9000-000

Flexible light guide 1500, 5/1000 mm
417075-9100-000

Illuminator carrier S, M8-M8
435441-0000-000



Articulated arm S, M8-M8
435443-0000-000

Clamp S to flexible light guide
435442-0000-000



Cold light source CL 1500 HAL
435710-9000-000

Conversion filter, d=28 mm
000000-1063-317 (without fig.)

Flexible light guide 1500, 8/1000 mm
417063-9901-000

Light guide 1500 with focusing attachment, 6/1000 mm
455145-0000-000

Flexible light guide 1500, 5/2200 mm
417075-9220-000

Flexible light guide 1500 ECO, 2x 4.5/1000 mm
435540-9002-000
Flexible light guide 1500, 5/1000 mm
417075-9100-000 (without fig.)
(one-armed, with metal PVC hose)

Goose-neck light guide 1500-90°, 2x 4.5/620 mm
417075-9040-000
Goose-neck light guide 1500, 4.5/600 mm
417052-9901-000 (without fig.)

Line light S, l=50 mm
000000-1063-307
(laterally grazing illumination)

Diffuse facelight M8 with light guide
435508-0000-000
(diffuse oblique illumination)

Focusing attachment, d=10 mm
417089-0000-000

Focusing attachment, d=6 mm, without filter
435540-9003-000

Polarizer for focusing attachment
417065-0000-000

Focusing attachment with screw-in filter set
417060-9901-000



Cold light source CL 4500 LED CRI90
435700-9200-000

Blue filter for CL LED
435700-9022-000
Green filter for CL LED
435700-9023-000
Yellow filter for CL LED
435700-9024-000
Red filter for CL LED
435700-9025-000
Neutral filter 0.25 CL LED
435700-9026-000
Halogen light filter CL 4500 LED
435700-9219-000

Foot button S
435602-9010-000

[Stages: see page "Stemi stands and stages"]
[Heating plate to base 300 (without fig.): directly from Tokai Hit]

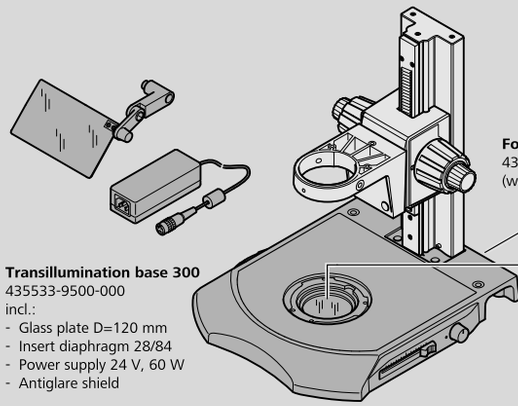

Transillumination base 300
435533-9500-000
incl.:
- Glass plate D=120 mm
- Insert diaphragm 28/84
- Power supply 24 V, 60 W
- Antiglare shield

Foot button S
435602-9010-000
(without fig.)



Stage adapter 84+120 for transillumination base 300
435533-9510-000

as a substitute:
Glass plate, D=120 mm
435501-0002-000

Polarizer S, D=84 mm
435531-0000-000